



ID TAG label & bracket



Door document holder opti.



Security padlock Hasp opti.




Ex-Cell

Technical data

	Type Ex-Cell
Marking accd. to 2014/34/EU	⊕ II 2 G Ex e II / ⊕ II 2 D Ex tD A21 IP66
Temperature class	T6 up to +40 °C / T5 up to +55 °C
EC-Type Examination Certificate	PTB 02 ATEX 1021 U
Application temperature	-20 °C to +40 °C -55 °C to +55 °C (option: closed cell expanded Silicone gasket)
Rated voltage	up to 750 V ¹⁾
Rated current	up to 500 A ¹⁾
Connecting terminals	up to 240 mm ² ¹⁾
Protection class	I
Degree of protection accd. to EN 60529	IP66
Cable glands/gland plates/enclosure drilling	up to 4 side optional gland plate combination with entries to meet requirements
Type of mounting	4 x 3 mm welded lugs with Ø 11 mm holes/slots, vertical or horizontal
Enclosure material	Stainless steel 316 L or 304 electro chemically polished or sheet steel polyester powder coated (RAL 7032)
Material thickness	1.2 mm (body), 1.5 mm (door)
Components mounting	4 x stand of pillars Ø 9 mm, 25 mm height, thread M6 x 10, for rail or mounting plate
Enclosure earth	M10 external and internal brass earth stud assembly
Gasket material	PUR, Chloroprene gasket (option), closed cell expanded Silicone gasket (option)

¹⁾ depending on type of terminal and Ex-components used
cULUs Typen 3S, 4, 4 x approval, Germanischer Lloyd available on request.

Dimension drawing

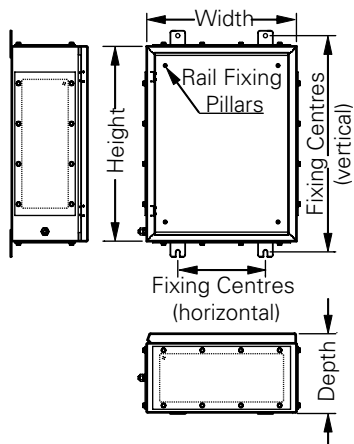

Ex-Cell Ex-e/Ex-i terminal box



1/4 fastening



Bolt fastening

Ordering details Ex-Cell up to 2 x 56 terminals

316L SS-90° Fastening Size	Dimensions ²⁾ H x W x D in mm	Fixing Centres ²⁾ B _{vertical} x B _{horizontal}	Weight in kg (empty enclosure)	Terminal rail		Rail length		Terminal content				
				Rail fixing vert.	horiz.	vert.	horiz.	Row orientation vertical				
								2,5 mm ²	4 mm ²	6 mm ²	10 mm ²	16 mm ²
23/15/13	229x152x127	152x208	2,35	129	52	149	72	1x21	1x17	1x13	1x10	1x 9
26/26/15	260x260x152	170x316	2,8	160	160	180	180	2x27	2x23	1x17	1x13	1x11
30/20/15	305x203x152	203x259	3,4	205	103	225	123	1x36	1x30	1x23	1x18	1x15
30/30/15	305x305x152	203x361	4,6	205	205	225	225	2x36	2x30	2x23	2x18	2x15
30/30/20	305x305x203	203x361	5,8	205	205	225	225	2x36	2x30	2x23	2x18	2x15
40/30/15	406x305x152	267x361	5,7	306	205	326	225	2x56	2x47	2x35	2x28	2x23
40/30/20	406x305x203	267x361	6,6	306	205	326	225	2x56	2x47	2x35	2x28	2x23

316L SS-90° Fastening Size	Available glanding area			Max. entry guide (metric)						Order No. ³⁾	
	Top & bottom	left	right	Top & bottom / left / right							
	(with gland plates fitted) in mm			M16	M20	M25	M32	M40	M50	M63	
23/15/13	108x 58	108x 58	108x 58	6/6/6	2/2/2	2/2/2	1/1/1	–	–	–	XLHS12315130
26/26/15	214x 80	114x 80	114x 80	21/11/11	10/5/5	4/2/2	3/2/2	3/1/1	2/1/1	–	XLHS12626150
30/20/15	156x 80	156x 80	156x 80	15/15/15	7/7/7	3/3/3	2/2/2	2/2/2	2/2/2	–	XLHS13020150
30/30/15	261x 80	156x 80	156x 80	26/15/15	13/7/7	5/3/3	4/2/2	3/2/2	3/2/2	–	XLHS13030150
30/30/20	261x124	214x124	261x124	34/28/34	18/15/18	15/12/15	8/6/8	6/5/6	3/2/3	2/2/2	XLHS13030200
40/30/15	261x 80	261x 80	261x 80	26/26/26	13/13/13	5/5/5	4/4/4	3/3/3	3/3/3	–	XLHS14030150
40/30/20	261x124	261x124	261x124	34/34/34	18/18/18	15/15/15	8/8/8	6/6/6	3/3/3	2/2/2	XLHS14030200

Options

with 1 gland plate	XLH S1 XXYYZZ 1	with 3 gland plate	XLH S1 XXYYZZ 3
Ex-Cell 316L SS - bolt fastening	XLH S1 XXYYZZ0- B	Ex-Cell 304 SS - 1/4 fastening	XLH S2 XXYYZZ 0
Ex-Cell 304 SS - bolt fastening	XLH S2 XXYYZZ0- B	Ex-Cell painted - 1/4 fastening	XLH PS XXYYZZ 0
Ex-Cell painted - bolt fastening	XLH PS XXYYZZ0- B	Permanent Padlock HASP Facility (Factory fitted ONLY)	XLH NN XXYYZZ0- HASP

Type

Order No.

Example

30/20/15 with 3 gland plate, painted with bolt fastening and Permanent Padlock HASP Facility **XLHPS 3020153-B-HASP**

Note: 1. The information provided is based on the physical constraints of the enclosure. Please refer to the certificate for hazardous area applications.

2. Dimension drawing see page 2.2.45

3. Refer to „OPTIONS“ for ordering key



Ex-Cell

2

Ordering details Ex-Cell up to 3 x 77 terminals

316L SS-90° Fastening Size	Dimensions ²⁾ H x B x T in mm	Rail fixing centres ²⁾ B _{vertical} x B _{horizontal}	Weight in kg (empty enclosure)	Terminal rail		Rail length		Terminal content				
				Rail fixing vert.	horiz.	vert.	horiz.	Row orientation vertical				
								2,5 mm ²	4 mm ²	6 mm ²	10 mm ²	16 mm ²
40/40/15	406x406x152	267x462	7,1	306	306	326	326	3x56	3x47	3x35	3x28	3x23
40/40/20	406x406x203	267x462	8,1	306	306	326	326	3x56	3x47	3x35	3x28	3x23
40/50/15	406x508x152	267x564	8,5	306	408	326	428	4x56	4x47	4x35	4x28	4x23
40/50/20	406x508x203	267x564	9,7	306	408	326	428	4x56	4x47	4x35	4x28	4x23
50/40/15	508x406x152	354x462	8,5	408	306	428	326	3x77	3x64	3x48	3x38	3x32
50/40/20	508x406x203	354x462	9,7	408	306	428	326	3x77	3x64	3x48	3x38	3x32

316L SS-90° Fastening Size	Available glanding area			Max. entry guide (metric)						Order No. ³⁾	
	Top & bottom (with gland plates fitted) in mm	left	right	Top & bottom / left / right							
				M16	M20	M25	M32	M40	M50	M63	
40/40/15	337x 80	261x 80	261x 80	35/26/26	17/13/13	7/5/5	6/4/4	5/3/3	4/3/3	–	XLHS14040150
40/40/20	334x124	261x124	261x124	44/34/34	26/18/18	21/15/15	11/8/8	9/6/6	4/3/3	3/2/2	XLHS14040200
40/50/15	464x 80	261x 80	261x 80	48/26/26	24/13/13	10/5/5	8/4/4	7/3/3	6/3/3	–	XLHS14050150
40/50/20	460x124	261x124	261x124	62/34/34	35/18/18	29/15/15	15/8/8	13/6/6	5/3/3	4/2/2	XLHS14050200
50/40/15	337x 80	337x 80	337x 80	35/35/35	17/17/17	7/7/7	6/6/6	5/5/5	4/4/4	–	XLHS15040150
50/40/20	334x124	334x124	334x124	44/44/44	26/26/26	21/21/21	11/11/11	9/9/9	4/4/4	3/3/3	XLHS15040200

Options

with 1 gland plate	XLH S1 XXYYZZ 1	with 3 gland plate	XLH S1 XXYYZZ 3
Ex-Cell 316L SS - bolt fastening	XLH S1 XXYYZZ0- B	Ex-Cell 304 SS - 1/4 fastening	XLH S2 XXYYZZ 0
Ex-Cell 304 SS - bolt fastening	XLH S2 XXYYZZ0- B	Ex-Cell painted - 1/4 fastening	XLH PS XXYYZZ 0
Ex-Cell painted - bolt fastening	XLH PS XXYYZZ0- B	Permanent padlock HASP Facility (Factory fitted ONLY)	XLH NN XXYYZZ0- HASP

Type	Order No.
Example 40/50/20 with 1 gland plates, 316L SS with bolt fastening and Permanent Padlock HASP Facility	XLHS14050201-B-HASP

Note: 1. The information provided is based on the physical constraints of the enclosure. Please refer to the certificate for hazardous area applications.
 2. Dimension drawing see page 2.2.45
 3. Refer to „OPTIONS“ for ordering key

Ex-Cell Ex-e/Ex-i terminal box



Ex-Cell

Ordering details Ex-Cell up to 4 x 97 terminals

316L SS-90° Fastening Size	Dimensions ²⁾ H x W x D in mm	Rail fixing centres ²⁾ B _{vertical} x B _{horizontal}	Weight in kg (empt enclosure)	Terminal rail		Rail length		Terminal content				
				Rail fixing centres vert.	horiz.	vert.	horiz.	Row orientation vertical				
								2.5 mm ²	4 mm ²	6 mm ²	10 mm ²	16 mm ²
50/50/15	508x508x152	354x564	10.2	408	408	428	428	4x77	4x64	4x 48	4x38	4x32
50/50/20	508x508x203	354x564	11.4	408	408	428	428	4x77	4x64	4x 48	4x38	4x32
50/60/20	508x610x203	354x666	13.2	408	510	428	530	6x77	6x64	6x 48	6x38	6x32
60/40/15	610x406x152	445x462	9.9	510	306	530	326	3x97	3x81	3x61	3x49	3x40
60/40/20	610x406x203	445x462	11.2	510	306	530	326	3x97	3x81	3x61	3x49	3x40
60/50/15	610x508x152	445x564	11.8	510	408	530	428	4x97	4x81	4x61	4x49	4x40
60/50/20	610x508x203	445x564	13.2	510	408	530	428	4x97	4x81	4x61	4x49	4x40

316L SS-90° Fastening Size	Available glanding area			Max. entry guide (metric)						Order No. ³⁾	
	Top & bottom	left	right	Top & bottom / left / right							
	(with gland plates fitted) in mm			M16	M20	M25	M32	M40	M50	M63	
50/50/15	464x 80	337x 80	337x 80	48/35/35	24/17/17	10/7/7	8/6/6	7/5/5	6/4/4	–	XLHS15050150
50/50/20	460x124	334x124	334x124	62/44/44	35/26/26	29/21/21	15/11/11	13/9/9	5/4/4	4/3/3	XLHS15050200
50/60/20	562x124	334x124	334x124	78/44/44	44/26/26	36/21/21	19/11/11	16/9/9	7/4/4	5/3/3	XLHS15060200
60/40/15	337x 80	464x 80	464x 80	35/48/48	17/24/24	7/10/10	6/8/8	5/7/7	4/6/6	–	XLHS16040150
60/40/20	334x124	460x124	460x124	44/62/62	26/35/35	21/29/29	11/15/15	9/13/13	4/5/5	3/4/4	XLHS16040200
60/50/15	464x 80	464x 80	464x 80	48/48/48	24/24/24	10/10/10	8/8/8	7/7/7	6/6/6	–	XLHS16050150
60/50/20	460x124	460x124	460x124	62/62/62	35/35/35	29/29/29	15/15/15	13/13/13	5/5/5	4/4/4	XLHS16050200

Options

with 1 gland plate	XLH S1 XXYYZZ 1	with 3 gland plate	XLH S1 XXYYZZ 3
Ex-Cell 316L SS - bolt fastening	XLH S1 XXYYZZ0- B	Ex-Cell 304 SS - 1/4 fastening	XLH S2 XXYYZZ 0
Ex-Cell 304 SS - bolt fastening	XLH S2 XXYYZZ0- B	Ex-Cell painted - 1/4 fastening	XLH PS XXYYZZ 0
Ex-Cell painted - bolt fastening	XLH PS XXYYZZ0- B	Permanent padlock HASP Facility (Factory Fitted ONLY)	XLH NN XXYYZZ0- HASP

Type Order No.

Example

60/50/20 with 3 gland plate, painted 1/4 turn lock and Permanent Padlock HASP Facility **XLHPS6050203-HASP**

Note: 1. The information provided is based on the physical constraints of the enclosure. Please refer to the certificate for hazardous area applications.

2. Dimension drawing see page 2.2.45

3. Refer to „OPTIONS“ for ordering key



Ex-Cell

Ordering details Ex-Cell up to 7 x 128 terminals

316L SS-90° Fastening Size	Dimensions ²⁾ H x W x D in mm	Rail fixing centres ²⁾ B _{vertical} x B _{horizontal}	Weight in kg (empty enclosure)	Terminal rail		Rail length		Terminal content				
				Rail fixing centres vert.	horiz.	vert.	horiz.	Row orientation vertical				
								2.5 mm ²	4 mm ²	6 mm ²	10 mm ²	16 mm ²
60/60/15	610x610x152	445x666	13.7	510	510	530	530	6x 97	6x 81	6x61	6x49	6x40
60/60/20	610x610x203	445x666	15.3	510	510	530	530	6x 97	6x 81	6x61	6x49	6x40
60/76/20	610x762x203	445x818	18.3	510	662	530	682	7x 97	7x 81	7x61	7x49	7x40
76/50/20	762x508x203	508x564	15.9	662	408	682	428	4x128	4x106	4x80	4x64	4x53
76/60/20	762x610x203	508x666	18.3	662	510	682	530	6x128	6x106	6x80	6x64	6x53
76/76/20	762x762x203	508x818	21.9	662	662	682	682	7x128	7x106	7x80	7x64	7x53

Enclosure dimensions and terminal content

316L SS-90° Fastening Size	Available glanding area			Max. entry guide (metric)						Order No. ³⁾	
	Top & bottom	left	right	Top & bottom / left / right							
	(with gland plates fitted) in mm			M16	M20	M25	M32	M40	M50	M63	
60/60/15	562x 80	464x 80	464x 80	59/48/48	29/24/24	12/10/10	10/8/8	8/7/7	7/6/6	–	XLHS16060150
60/60/20	562x124	460x124	460x124	78/62/62	44/35/35	36/29/29	19/15/15	16/13/13	7/5/5	5/4/4	XLHS16060200
60/76/20	714x124	460x124	460x124	100/62/62	56/35/35	47/29/29	24/15/15	20/13/13	9/5/5	7/4/4	XLHS16076200
76/50/20	460x124	562x124	562x124	62/78/78	35/44/44	29/36/36	15/19/19	13/16/16	5/7/7	4/5/5	XLHS17650200
76/60/20	562x124	562x124	562x124	78/78/78	44/44/44	36/36/36	19/19/19	16/16/16	7/7/7	5/5/5	XLHS17660200
76/76/20	714x124	562x124	562x124	100/78/78	56/44/44	47/36/36	24/19/19	20/16/16	9/7/7	7/5/5	XLHS17676200

Options

with 1 gland plate	XLH S1 XXYYZZ 1	with 3 gland plate	XLH S1 XXYYZZ 3
Ex-Cell 316L SS - bolt fastening	XLH S1 XXYYZZ0- B	Ex-Cell 304 SS - 1/4 fastening	XLH S2 XXYYZZ 0
Ex-Cell 304 SS - bolt fastening	XLH S2 XXYYZZ0- B	Ex-Cell painted - 1/4 fastening	XLH PS XXYYZZ 0
Ex-Cell Painted - bolt fastening	XLH PS XXYYZZ0- B	Permanent padlock HASP Facility (Factory Fitted ONLY)	XLH NN XXYYZZ0- HASP

Type	Order No.
------	-----------

Example

60/76/20 with 3 gland plate, 316 SS with bolt fastening and Permanent Padlock HASP Facility	XLHS16076203-B-HASP
--	----------------------------

Note: 1. The information provided is based on the physical constraints of the enclosure. Please refer to the certificate for hazardous area applications.

2. Dimension drawing see page 2.2.45

3. Refer to „OPTIONS“ for ordering key